

GLOBAL TRAILBLAZER IN FIREWOOD PROCESSING





THE BEST FIREWOOD PROCESSORS IN THE WORLD FOR EVERYONE

Hakki Pilke is the manufacturer of the world's most advanced firewood processors. Customers rely on our machines in more than 35 countries on six continents. We know firewood professionals and they most assuredly know us. Together with our customers and local dealers, we form a team that leads the way for the global markets. Our international operations and local service network ensure that the owners of our products around the world receive the best support and after-sales services. We are the most reliable and globally sought-after partner for firewood producers.

Hakki Pilke machines are designed with a consistent focus on the customer preferences and requirements for the development of their firewood operations. As a result of our customer-oriented, continuous and systematic quality development, our company has received the ISO 9001 quality certification.

TABLE OF CONTENTS

| Highest return for your investment | 4 |
|------------------------------------|----|
| Hakki Pilke 50 Pro | 6 |
| Hakki Pilke 43 Pro | 8 |
| Hakki Pilke 38 Pro | 10 |
| Hakki Pilke Falcon 35 | 12 |
| Hakki Pilke Raven 33 | 14 |
| Hakki Pilke OH 27 | 16 |
| Hakki Pilke Eagle | 17 |
| Log racks | 18 |
| Log tables | 19 |
| Log lifters | 20 |
| Other equipment | 21 |
| Technical specifications | 22 |
| | |





EFFICIENT, FAST, RELIABLE, DURABLE

HIGHEST RETURN FOR YOUR INVESTMENT

When you acquire a firewood processor, the purchase price is just one part of the lifecycle costs of the product. With a Hakki Pilke firewood processor you can be sure that the hidden lifecycle costs will remain low.


Each Hakki Pilke firewood processor is a compact powerhouse which combines Finnish engineering with industrial design. Industry's most advanced hydraulic design ensures low fuel and energy consumption and long life of components. User needs, product quality, high productivity and low operating costs are at the heart of our design process.

We pay special attention to ergonomics to facilitate the use of the machines. The Hakki Pilke firewood processor is safe to operate in all conditions.

operation guarantee continuous high productivity. Ease of and minimal need for maintenance keeps breaks short, which gives you more time to operate the machine.

Fast set-up and adjustment, smooth material flow and uninterrupted

The durability of the machines guarantees their resale value. By selecting a Hakki Pilke firewood processor, you will make a profitable investment that retains its value. The Hakki Pilke is the most popular firewood processor of all time – and not without reason. The unique properties of the Hakki Pilke firewood processor make it the best in the world.

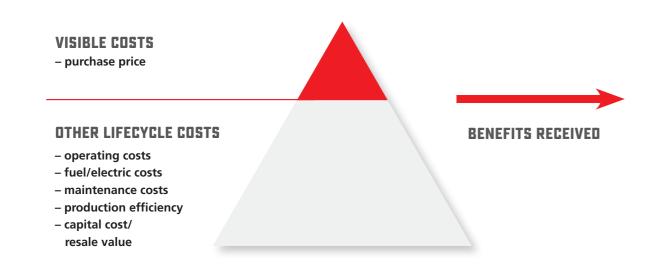







The Hakki Pilke 50 Pro was designed in close cooperation with firewood professionals. It has been tested with a variety of wood types across the globe to ensure international viability as a professional-grade machine for industrial firewood production and consistently superior performance in all conditions.

The machine comes as standard with a wide range of features that improve efficiency and facilitate work. The HakkiCut™ sawing interface makes using the machine fast and ergonomic. Sawing is performed at the press of a button, and the splitting and feeding mechanisms are controlled with a joystick. During cutting, the lowering speed of the saw bar is automatically adjusted according to the resistance, ensuring a fast and efficient process.

The standard equipment also includes the delay-free HakkiSplit™ splitting system, AC10 automatic chain tensioner, cleaning out-feed conveyor and adjustable work platform.

- SIGNIFICANTLY FASTER SPLITTING CYCLE THAN COMPETITION
- NO V-BELTS OR MECHANISMS THAT ARE SUBJECT TO WEAR
- LOW MAINTENANCE NEEDS



50 Pro is equipped with patented AC 10 automatic chain tensioner. Always correct chain tension makes cutting efficient and extends the chain and bar life remarkably.







TECHNICAL SPECIFICATIONS

| Max log diameter | 470 mm | 19" | | |
|--|--------------|-----------|--|--|
| Max log length | 600 mm | 24" | | |
| Maximum splitting power | 30 t | | | |
| Bar | 20" | | | |
| Power source | PTO, sm, com | nbi | | |
| Splitting blade | 6-way | | | |
| Outfeed conveyor length | 4 m | 13′1″ | | |
| Outfeed conveyor width | 400 mm | 16" | | |
| Infeed conveyor (width x length)* | 0.3 x 2.85 m | 12"x 9'4" | | |
| STANDARD EQUIPMENT | | | | |
| Infeed serial connection kit + valv | e | | | |
| Accessory valve | | | | |
| Hydraulic infeed conveyor | | | | |
| Additional hydraulic infeed roller | | | | |
| Infeed guide plate | | | | |
| Hydraulic log clamp | | | | |
| Safety cover | | | | |
| AC10 automatic chain tensioner (hydraulic) | | | | |
| HakkiCut™ cutting control | | | | |
| Automatically optimised saw lowering speed | | | | |
| Automatic chain oil lubrication | | | | |
| Hydraulically retracted log measuring device | | | | |
| Hydraulic height adjustment of the splitting blade | | | | |
| HakkiSplit™ delay-free splitting (3 speeds) | | | | |
| Hydraulic vertically and laterally pivoting outfeed conveyor | | | | |
| Outfeed conveyor speed control + reversal | | | | |
| Cleaning outfeed conveyor | | | | |
| Oil cooler | | | | |
| Adjustable work platform | | | | |
| DIMENSIONS IN TRANSPO | ORT POSITION | N | | |
| Height | 2,900 mm | 9'6" | | |
| Length | 3,100 mm | 10'2" | | |
| Width | 1,520 mm | 5'0" | | |
| Weight | 2,200 kg | 4,850 lbs | | |
| | | | | |

ACCESSORIES

| 100200011120 | | |
|----------------------------|----------------|--------|
| plitting blade | 2/4, 8, 12-way | |
| Output conveyor extension | 1 m | 39" |
| lower sawdust removal (TR) | | |
| il heater | | |
| lakkiFeed | 422, 47 | 1, 472 |
| lakki Pilke Cleaner | | |
| lakki Pilke Roller | | |
| owerpack | | |



Replacing the splitting blade is fast and safe thanks to the detachable winch.



Easy-to-use control panel where infeed, cutting and splitting are all controlled with just one joystick.







The Hakki Pilke 43 Pro is an entirely unique firewood processor based on the Easy 42 model, highly regarded among professional users. Despite the increased robustness of the frame, the machine is compact in terms of its dimensions and weight. The productivity of the machine has been improved with the excellent delay-free HakkiSplit™splitting mechanism as well as new features that ensure uninterrupted material flow – a hydraulic log clamp, a hydraulically retracted measuring device and log landing plates. If the machine is mainly used to process large logs or produce sizeable firewood, buyers can also opt for the wider outfeed conveyor used in the 50 Pro model.

In terms of the operator, the most significant update is the user interface that provides a fully revamped user experience. The HakkiCut™ cutting control always adds optimal cutting force and enables whole cutting operation with one joystick button. Combined with the automatic, hydraulically operated chain tensioner and the automatic chain lubrication pump, which is activated during sawing, these features ensure that the saw chain and bar last for a long time and provide unparalleled sawing efficiency time and time again. When being used the infeeding assistant feeds in a new log automatically during the splitting motion, ensuring that the next log is ready for cutting already during the splitter's return motion.

The 43 Pro model boasts a wealth of features that reduce operating costs. The large oil capacity enables longer oil change intervals and uninterrupted operation in all conditions from Alaska to Australia. Reliable electric control minimizes the number of elements and components that require maintenance. Adjusting the amount of chain oil is easy and replacing the chain oil canister takes only seconds. The power transmission features no v-belts, which ensures consistent reliability and performance year after year with minimal electric or fuel costs.

43 PRO 430/17 MM/IN 600/24 MM/IN 15 T

- NEW USER INTERFACE
- GUIDE PLATES FOR CONTROLLED LOG LANDING
- AUTOMATIC HYDRAULIC CHAIN TENSIONER AS STANDARD
- POWER WITHOUT COMPROMISING SPEED





The log landing plates ensure that even the shortest cut logs land neatly into the splitting groove.



An unparalleled user interface which enables you to process firewood with just two buttons.



The machine's functions can be easily controlled with the ergonomic and easy-to-use control panel.



The hydraulic log clamp enables logs of all sizes to be sawed effortlessly.



The AC 10 automatic chain tensioner maintains optimal saw chain tension at all times. The chain can be conveniently replaced after releasing chain tension with the lever pictured – no tools required!

TECHNICAL SPECIFICATIONS Max log diameter 430 mm 17"

| IVIAN IOG GIATTIETET | 430 111111 | 17 |
|---|--|------------|
| Max log length | 600 mm | 24" |
| Maximum splitting power | 15 t | |
| Bar | 18" | |
| Power source | PTO, electric | , combi |
| Splitting blade | 6-way | |
| Outfeed conveyor dimensions | 0.25 x 4 m | 10"x 13'1" |
| Infeed conveyor length * | 2.5 m | 8'2" |
| STANDARD EQUIPMENT | | |
| Infeed serial connection kit | | |
| Additional hydraulic infeed roller | | |
| Accessory valve | | |
| Hydraulic infeed conveyor | | |
| Infeed guide plate | | |
| Infeed assist valve | | |
| Hydraulic log clamp | | |
| Safety cover | | |
| AC10 automatic chain tensioner (hy | draulic) | |
| HakkiCut [™] cutting control | | |
| Automatically optimised cutting spe | ed | |
| Automatic chain oil lubrication | | |
| Hydraulically retracting log measuring | g device | |
| HakkiSplit™ delay-free splitting (3 sp | peeds) | |
| Guide plates for controlled log landi | ng (landing pla | ites) |
| Hydraulic height adjustment of the s | splitting blade | |
| Cleaning outfeed conveyor | | |
| Pivoting outfeed conveyor | | |
| Outfeed conveyor speed control + re | everse | |
| Oil cooler | | |
| Tool box | | |
| DIMENSIONS IN TRANSPOR | RT POSITION | |
| Height | 2,560 mm | 8′5″ |
| Length | 2,540 mm | 8'4" |
| Width | 1,400 mm | 4'7" |
| Weight | 1,400 kg | 3,087 lbs |
| OPTIONAL EQUIPMENT | | |
| Adjustable work platform | | |
| Splitting blade | 2/4, 8, 12-way 16-way for soft wood | |
| Large outfeed conveyor with hydraulic horizontal and vertical adjustment (+250 kg / +550 lbs) | 4 m x 400 m 13'1" x 1'4" | m |
| Outfeed conveyor extension | 1 m | 3'3" |
| Blower saw-dust removal | | |
| Oil heater | | |
| ACCESSORIES | | |
| HakkiFeed | 422, 471, 47 | '2 |
| Hakki Pilke Cleaner | | |
| Hakki Pilke Roller | | |
| Powerpack | | |
| | | |

^{*} length with a hydraulic infeed roller

^{**} combi model with standard conveyor







Hakki Pilke 38 Pro brings unparalleled efficiency to firewood processing. An effortless, ergonomic and efficient HakkiCut™ cutting control enables sawing with a single press of a joystick button. During cutting, the lowering speed of the saw bar is automatically adjusted according to the resistance, ensuring an efficient and fast process. At a splitting force of 10 t, the 38 Pro can split even the hardest wood, achieving a splitting cycle of no more than 3 seconds.

In the 38 Pro processor, the AC10 automatic chain tensioner functions mechanically. The patented AC10 system maintains the chain at optimal tension, improving the efficiency of the sawing process and providing a significant increase to the life span of the chain and bar. In addition to sawing and cutting, the joystick is used to adjust the height of the splitting blade and control the infeed conveyor. The 38 Pro model also features the familiar Hakki Pilke cleaning outfeed conveyor, which separates debris from firewood without any additional accessories. As a new feature, the machine also includes a control valve for the outfeed conveyor – this can be used to reverse or stop the conveyor belt as necessary.

- NEW USER INTERFACE
- ELECTRICAL CONTROL OF CUTTING AND SPLITTING
- PLENTY OF POWER
- NO V-BELTS OR MECHANISM THAT ARE SUBJECT TO WEAR



Electrical control of sawing and splitting with just two buttons.



Patented cleaning outfeed conveyor as standard. The groove at the end of the outfeed conveyor separates debris from the firewood.

TECHNICAL SPECIFICATIONS

600 mm

Max log diameter

Max log length

| Wax log length | 000 111111 | - 1 |
|--------------------------------------|--------------------------|-----------|
| Maximum splitting power | 10 t | |
| Bar | 16" | |
| Power source | PTO, electric | , combi |
| Splitting blade | 2/4-way | |
| Outfeed conveyor length | 4 m | 13′1″ |
| Infeed conveyor length | 2.2 m | 7′2″ |
| STANDARD EQUIPMENT | | |
| Infeed serial connection kit + valve | 1 | |
| Accessory valve | | |
| Hydraulic infeed conveyor | | |
| Safety cover | | |
| AC10 automatic chain tensioner (r | nechanical) | |
| HakkiCut™ cutting control | | |
| Automatically optimised cutting sp | eed | |
| Automatic chain oil lubrication | | |
| Hydraulic splitting blade adjustmen | nt | |
| Automatic speed valve | | |
| Pivoting outfeed conveyor | | |
| Outfeed conveyor speed control + | reverse | |
| Cleaning outfeed conveyor | | |
| Tool box | | |
| DIMENSIONS IN TRANSPO | | |
| Height | 2,520 mm | 8'3" |
| Length | 2,480 mm | 8′1″ |
| Width | 1,300 mm | 4'3" |
| Weight | 880 kg | 1,940 lbs |
| OPTIONAL EQUIPMENT | | |
| Hydraulic infeed roller | | |
| Infeed guide plate | | |
| Splitting blade | 6, 8-way 12-way for s | oft wood |
| Hydraulically pivoting outfeed conv | veyor | |
| Outfeed conveyor extension | 1 m | 3'3" |
| Blower saw-dust removal | | |
| Oil heater | | |
| Oil cooler | | |
| ACCESSORIES | | |
| HakkiFeed | 371, 422, 47 | 71, 472 |
| HakkiLift | 381 | |
| Hakki Pilke Cleaner | | |
| Hakki Pilke Roller | | |
| Powerpack | | |
| | | |

PRO SERIES WITH UNPARALLELED POWER AND EFFICIENCY





Together, the AC10 and electrical saw control ensure fast and uninterrupted operation.



The ergonomic and easy-to-use control panel includes all the controls needed to operate the machine.



Large oil tank capacity and sight glass.

HAKKIPILKE[®] Falcon 35



In its category, the Falcon 35 boasts the fastest splitting on the market by far, and the one-hand control lever makes the machine very easy to use.

Thanks to the hydraulic saw and conveyors, the machine has no V-belts. Safety and comfort are ensured by the single-piece safety cover. The adjustable hydraulic chain oil lubrication pump ensures the long service life of the chain and bar. The lubrication pump gets its oil from a separate canister, which can be replaced quickly, without making a mess. The machine's open lower structure enables easy cleaning and the integrated tool box ensures that important equipment is always at hand. Thanks to our wide range of accessories, you can easily customize the machine to your liking.

- FASTEST SPLITTING CYCLE IN ITS CATEGORY
- ONE-HAND CONTROL LEVER
- FAST HYDRAULIC FUNCTIONS NO V-BELTS
- CUTTING CHAIN LUBRICATION WITH AN ADJUSTABLE PUMP



Hydraulic hoses can be connected to the machine easily with quick couplers available as an accessory.



Effective hydraulic saw.



The cleaning outfeed conveyor separates debris, which results in cleaner firewood.



Convenient tool box as standard.



The ergonomic and easy-to-use control panel makes the machine easy to operate.

TECHNICAL SPECIFICATIONS

| Max log diameter | 350 mm | 14" |
|---------------------------------|---------------|----------|
| Max log length | 500 mm | 20" |
| Maximum splitting power | 8.0 t | |
| Bar | 16" | |
| Power source | PTO, electric | c, combi |
| Splitting blade | 2/4-way | |
| Outfeed conveyor length | 4 m | 13′1″ |
| Infeed conveyor length | 2.2 m | 7′2″ |
| STANDARD EQUIPMENT | Τ | |
| Hydraulic infeed conveyor | | |
| Safety cover | | |
| Automatic chain oil lubrication | | |
| Automatic speed valve | | |
| Pivoting outfeed conveyor | | |
| Outfeed conveyor speed control | | |
| Cleaning outfeed conveyor | | |
| Tool box | | |
| DIMENSIONS IN TRANSPO | ORT POSITIO | N |
| Height | 2,530 mm | 8'3" |
| Length | 2,550 mm | 8'4" |
| Width | 1,250 mm | 4'1" |

Weight

1,918 lbs

870 kg

| OPTIONAL EQUIPMENT |
|--------------------|
|--------------------|

| · · · · · · · · · · · · · · · · · · · | | |
|---------------------------------------|---------------------|-----------|
| Infeed serial connection kit + valve | | |
| Accessory valve | | |
| Hydraulic infeed roller | | |
| Infeed guide plate | | |
| Splitting blade | 6-way | |
| Outfeed conveyor extension | 1 m | 3'3" |
| Blower saw-dust removal | | |
| Oil cooler | | |
| Oil heater | | |
| ACCESSORIES | | |
| HakkiFeed | 371 (422, 471 ar | nd 472) * |
| HakkiLift | Falcon | |
| Hakki Pilke Cleaner | | |
| Hakki Pilke Roller | | |
| Powerpack | | |

^{*} requires an additional valve



HAKKIPILKE® Raven 33



The Hakki Pilke Raven 33 is a reliable and easy-to-use firewood processor. The machine's direct drive hydraulics enable simultaneous functions with effortless motions of the operating lever. The robust structure and minimal need for maintenance ensure that the machine is cost-efficient to use. Effortless operation and sufficient splitting power enable the processor to split even the largest of logs – get ready to make firewood for all purposes with unparalleled ease.

The single-piece cover, which is linked with the machine's operation and equipped with gas shocks, ensures safe operation and easy saw chain maintenance. It can also be easily opened in the event of malfunctions. The low power requirement and weight enable the machine to be used with lighter equipment. The Raven 33 comes as standard with belt feed and a laterally pivoting hydraulic outfeed conveyor.

Accessories can be used to equip the firewood processor for every need. A log lifter and various log tables can be used to reduce the work load even further. The 6-way splitting blade turns even the sturdiest of logs into conveniently sized firewood. The infeed conveyor reverse valve can be used to feed and reverse logs regardless of the machine function. The features of the Raven 33 firewood processor make it a perfect fit for shared use.

- ROBUST STRUCTURE
 AND MINIMAL NEED FOR
 MAINTENANCE
- SAFE TO USE
- THE MACHINE CAN BE EQUIPPED FOR EVERY NEED



Comes with a hydraulically pivoting outfeed conveyor as standard.

TECHNICAL SPECIFICATIONS

| IEPUNIPAT 2LE | BII IBA | IIUII |
|--------------------------------------|--|-------|
| Max log diameter | 330 mm | 13" |
| Max log length | 500 mm | 20" |
| Maximum splitting power | 6 t | |
| Bar | 15" | |
| Power source | PTO, electric | |
| Splitting blade | 2/4-way | |
| Outfeed conveyor length | 4 m | 13′1″ |
| Infeed conveyor length | 2.2 m | 7′2″ |
| STANDARD EQUIPMENT | | |
| Hydraulic infeed conveyor | | |
| Safety cover | | |
| Automatic chain oil lubrication | | |
| Automatic speed valve | | |
| Pivoting outfeed conveyor | | |
| Infeed conveyor reverse valve | | |
| Cleaning outfeed conveyor | | |
| DIMENSIONS IN TRANSPO | RT POSITIO | N |
| Height | 2,450 mm | 8′0″ |
| Length | 2,500 mm | 8′2″ |
| Width | 1,200 mm | 3′11″ |
| Weight | 820 kg | 1,808 |
| OPTIONAL EQUIPMENT | | |
| Infeed serial connection kit + valve | | |
| Accessory valve | | |
| Infeed guide plate | | |
| Splitting blade | 6-way | |
| Outfeed conveyor extension | 1 m | |
| Outfeed conveyor speed control | | |
| Heater for oil | | |
| Toolbox | | |
| ACCESSORIES | | |
| HakkiLift | Raven * | |
| HakkiFeed | 371 (422, 471 and 472) ³ | |
| Hakki Pilke Cleaner | | |
| Hakki Pilke Roller | | |
| Powerpack | | |

^{*} requires an additional valve



Infeed conveyor reverse valve available as standard.



Log feed using a heavy duty belt with a rough surface.



Outfeed conveyor speed control valve as easy-to-install accessory.



HAKKIPILKE[®] OH 27



270/11
MM/IN
600/24
MM/IN
5.5
T

The Hakki Pilke OH 27 is an easy-to-use firewood processor for domestic use. It can be equipped with a separate electric motor or used with a tractor. The OH 27 comes with an outfeed conveyor, making it easy to move firewood directly to a shed, pile or trolley.

Depending on the knife used, the wood can be split into up to six parts, producing conveniently sized firewood even from sturdy logs. The Hakki Pilke OH 27 circular saw features a hard-tipped blade, which efficiently cuts through the dirtiest and muddiest of logs. The cutting cradle and sturdy log clamp make cutting easy and effortless. A valve that automatically accelerates the splitting cycle is available for the Hakki Pilke OH 27 as an accessory. It speeds up the splitting cycle for logs that require less force by up to 33%.

TECHNICAL SPECIFICATIONS

| Max log diameter | 270 mm | 11" |
|----------------------------|--------------|-----------|
| Max log length | 600 mm | 24" |
| Splitting power | 5.5 t | |
| Circular saw | 700 mm | 28" |
| Power source | PTO, combi | |
| Splitting blade | 2/4-way | |
| Outfeed conveyor length | 3.2 m | 10'6" |
| Cutting cradle length | 1.8 m | 5′11″ |
| STANDARD EQUIPMENT | | |
| Hard tipped cutting blade | | |
| DIMENSIONS IN TRANSPO | ORT POSITION | J |
| Height | 2,480 mm | 8'1" |
| Length | 2,550 mm | 8'4" |
| Width | 800 mm | 31" |
| Weight | 560 kg | 1,235 lbs |
| OPTIONAL EQUIPMENT | | |
| Splitting blade | 6-way | |
| Automatic speed valve | | |
| Outfeed conveyor extension | 0.8 m | 31" |
| ACCESSORIES | | |
| HakkiFeed | 371 | |

- TRADITIONAL FIREWOOD PROCESSOR WITH A CIRCULAR SAW
- 5.5-TONNE SPLITTING POWER AS STANDARD
- EFFORTLESS AND SAFE CUTTING



6-way splitting blade available as an accessory.



The height of the splitting blade can be adjusted quickly and easily with a manual lever.

HAKKIPILKE[®] Eagle



The Hakki Pilke Eagle circular saw makes the cutting and splitting of logs simple and easy.

Tractor-powered and electrically-powered versions of the machine are available. The splitting circular saw features a hard metal blade which efficiently cuts through even the dirtiest and muddiest wood. The Hakki Pilke Eagle can be equipped with transport wheels to make moving the machine easier.

TECHNICAL SPECIFICATIONS

| Max log diameter | 270 mm | 11" |
|----------------------------------|---------------|---------|
| Max log length | 450 mm | 18" |
| Power source | PTO, electric | |
| STANDARD EQUIPMENT | | |
| Hard tipped cutting blade | 700 mm | 28" |
| DIMENSIONS IN TRANSPORT POSITION | | |
| Height | 1,300 mm | 4'3" |
| Length | 950 mm | 3'1" |
| Width | 1,700 mm | 5′7″ |
| Weight | 185 kg | 408 lbs |
| OPTIONAL EQUIPMENT | | |
| Transport wheels | | |

EAGLE



270/11 MM/IN

450/18 MM/IN

- SAFE AND WELL-PROTECTED CIRCULAR SAW
- HARD TIPPED CUTTING KNIFE
- FULLY THREADED STEEL CONE



Safe splitting with a steel cone.



The machine uses a simple cutting cradle in which the log is cut with a hard tipped cutting blade.

LOG RACKS

HAKKIFEED 371


| Log rack length | 2,350 mm | 7′9″ |
|-----------------|--------------|------------|
| Log rack width | 2,080 mm | 6′10″ |
| Weight | 200 kg | 441 lbs |
| Height | 880/1,220 mm | 35" / 4'0" |
| | | |



The inclined structure of the HakkiFeed 371 log rack makes it easy to feed logs onto the firewood processor's infeed conveyor belt. The rack's robust structure ensures that it can be used with almost all firewood processor models.

HAKKIFEED 422

| Log rack length | 2,480 mm | 8'2" |
|--------------------|----------------|-----------|
| Log rack width | 2,280 mm | 7'6" |
| Height, adjustable | 880-1,320 mm | 35"-4'4" |
| | 1,230–1,660 mm | 4'0"-5'5" |
| Weight | 285 kg | 628 lbs |
| | | |





LOG TABLES

HakkiFeed 470-series are robust log tables designed to offer full control of awkward knotty and crooked logs even when piled in up in layers. Hydraulically operated feed chains and log separators ensure that the table moves only one log at a time to infeed rollers. The log table's infeed rollers are synchronised with the firewood processor's infeeding function.



HAKKIFEED 471

| Log rack length, extendable | 3,600-7,600 mm | 11'10"-24'11" |
|-----------------------------|----------------|---------------|
| Log table width, adjustable | 950-1,500 mm | 37"-4'11" |
| Height, adjustable | 1,000-1,440 mm | 3'3"-4'9" |
| Weight | 616 kg | 1,358 lbs |
| | 5 | |

HakkiFeed 471 is a versatile 2-chained log table for professional firewood operations. The width of the log table is adjustable making it perfect for shorter logs up to 4 metres (13 ft.) in length.

HAKKIFEED 472

| Log table length, extendable | 3,600–7,600 mm | 11'10"-24'11" |
|------------------------------|----------------|---------------|
| Log table width | 2,200 mm | 7′3″ |
| Height, adjustable | 1,000–1,440 mm | 3′3″–4′9″ |
| Weight | 925 kg | 2,039 lbs |
| | | |

HakkiFeed 472 is a heavy-built 3-chained log table for commercial operations processing long and large logs. The table is designed for logs between 2,5 (8 ft.) and 6 metres (20 ft.) in length, but is suitable also for longer poles.

Both log tables can be extended with 2-metre (6½ ft.) extensions up to total loading space of 6 metres (20 ft.) All legs are adjustable which make it easy to set up even on an uneven surface. The HakkiFeed 470-series log tables can be connected easily to the 38, 43 and 50 models, and with an accessory valve and connector kit with Falcon and Raven.





LOG LIFTERS

The HakkiLift log lifters help you lift logs from the ground to the firewood processor.

They can lift even the largest of logs effortlessly to the infeed conveyor and make the operation safe and ergonomic. HakkiLift is a perfect solution for contractors processing logs in multiple locations requiring easy portability and for operations without the necessary equipment to load the log table.







HAKKILIFT RAVEN

| Max log diameter | 300 mm | 12" |
|------------------|-----------|---------|
| Max log length | 4,000 mm | 13'1" |
| Lifter length | 2,350 mm | 7′8″ |
| Lifter width | 1,170 mm | 3'10" |
| Weight | 95 kg | 209 lbs |
| Lifting range | 50/850 mm | 2"/33" |

HAKKILIFT 381 (EASY 38/38 PRO)

| Max log diameter | 380 mm | 15" |
|------------------|-------------|---------|
| Max log length | 4,000 mm | 13'1" |
| Lifter length | 2,220 mm | 7′3″ |
| Lifter width | 1,100 mm | 3′7″ |
| Weight | 70 kg | 154 lbs |
| Lifting range | 50/1,000 mm | 2"/3'3" |

HAKKILIFT FALCON

| Max log diameter | 350 mm | 14" | | | |
|------------------|-------------|---------|--|--|--|
| Max log length | 4,000 mm | 13'1" | | | |
| Lifter length | 2,150 mm | 7′1″ | | | |
| Lifter width | 1,150 mm | 3'9" | | | |
| Weight | 70 kg | 154 lbs | | | |
| Lifting range | 50/1,000 mm | 2"/3'3" | | | |





The support is integrated inside the arm.



The transport support is pulled out from the arm and over the infeed conveyor.

Transport support allows you to move the firewood processor and the log lifter quickly in the working area. For road transport, log lifter needs to be set in transport position and attached to the processor according to user manual.

OTHER EQUIPMENT

HAKKI PILKE CLEANER

| Length | 2,870 mm | 9'5" |
|--------------------|------------------|-------------------|
| Width | 1,190 mm | 3'11" |
| Height, adjustable | max 2,870 mm | 9'5" |
| Weight | 500 kg | 1,102 lbs |
| | * Weight without | outfeed conveyor. |

Cleaning the firewood speeds up the drying process and ensures consistent quality. The outfeed conveyor moves the firewood to the rotating drum of the Cleaner which separates debris and moves it to the desired location with guide plates. From the Cleaner, the firewood can be conveyed into sacks, for example, using the guide plate (standard equipment).

The laterally pivoting outfeed conveyor (3 m), which is available as an accessory, can be used to convey the firewood onto a trolley, for example. The Hakki Pilke Cleaner is available with an electric or hydraulic drive. Thanks to its adjustable height, the Cleaner can be connected to almost all firewood processor models.

HAKKI PILKE ROLLER

| Length | 3,400 mm | 11'2" |
|--------------------|------------------|-------------------|
| Width | 1,515 mm | 4'12 |
| Height, adjustable | 2,155-3,020 mm | 7′1″–9′11″ |
| Weight | 950 kg * | 2,094 lbs |
| | * Weight without | outfeed conveyor. |

Hakki Pilke Roller was designed for cleaning large quantities of firewood. The wood is guided into the Roller using the firewood processor's outfeed conveyor or a loader, for example. The vibrating rollers separate all debris from the firewood, ensuring a high-quality end result. The pivoting 3-metre outfeed conveyor - previously featured in the Cleaner - is available for the Roller cleaner as an accessory. The Roller is available as an electric and hydraulic version.

HAKKI PILKE POWER UNIT

| Length | 1,020 mm | 3'4" |
|--------|----------|---------|
| Width | 1,230 mm | 4'0" |
| Height | 1,000 mm | 3′3″ |
| Weight | 165 kg * | 364 lbs |

^{*} Weight without engine.

Hakki Pilke Powerpack is a compact and efficient power source for tractor-powered or combi Hakki Pilke firewood processors. It is the perfect solution when you need the tractor for other tasks, such as moving logs instead of running the firewood processor.

Hakki Pilke offers also direct drive petrol engine kit for all models. With this option a PTO shaft is not required and the engine powers the hydraulic pump directly, offering the most fuel efficient solution with engine sizes varying from 18 to 35 hp. Inquire for available engine options from your local dealer.



TECHNICAL SPECIFICATIONS







- ★ We recommend
- available
- tractor hydraulics
- standard accessory

22

- requires an additional valve
- • requires an additional valve and special equipment

- * available with laterally pivoting outfeed conveyor

 ** laterally pivoting outfeed conveyor as standard

 *** The machine can be placed in the transport position when the outfeed conveyor extension has been installed in the centre of the standard conveyor. The height of the transport arrangement is increased by the length of the outfeed conveyor extension.

The manufacturer reserves the right to make changes.

| MODEL | | 50 Pro 43 Pro | | 38 Pro Falcon 35 | | Rave | en 33 | ОН | 27 | Eagle | | | | |
|---|-------|---------------|--------|------------------|--------|----------------|-------|------------|-------|-----------|--------|-----------|-------|---------|
| Recommended use | | | 30110 | | | | | | - | | | | | |
| - domestic use | | | | * | | * | | * | | * | * | | | |
| – professional use | | * | | * | | * | | * | | ^ | | ^ | | |
| - industrial production | | * | | * | | * | | ^ | | | | | | |
| Features | | ^ | | ^ | | ^ | | | | | | | | |
| Max log diameter (mm) | 470 | 19" | 430 | 17" | 380 | 15" | 350 | 14" | 330 | 13" | 270 | 11" | 270 | 11" |
| Max log length (mm) | 600 | 24" | 600 | 24" | 600 | 24" | 500 | 20" | 500 | 20" | 600 | 24" | 450 | 18" |
| Circular saw Ø (mm) | 000 | 2-7 | 000 | 2-7 | 000 | 2-7 | 300 | 20 | 300 | 20 | 700 | 28" | 700 | 28" |
| Chain saw, saw bar | 1 | 20 | | 18 | | 16 | | 16 | 1 | 15 | 700 | 20 | 700 | 20 |
| Maximum splitting power (t) | | 30 | | 15 | | 10 | | 8 | | 6 | | .5 | | |
| Accessories | - | 50 | | 13 | | 10 | | 0 | , | 0 | | | | |
| Infeed serial connection kit | | • | | • | | • | | • | | • | | | | |
| Accessory valve | | • | | • | | • | | | | - | | | | |
| Hydraulic infeed conveyor | | • | | • | | • | | • | | • | | | | |
| Hydraulic infeed conveyor Hydraulic infeed roller | | • | | • | | • | | • | | • | | | | |
| Infeed guide plate | | • | | • | | - | | - | | • | | | | |
| Infeed assist valve | | • | | • | | _ | | - | | - | | | | |
| | | • | | • | | | | | | | | | | |
| Hydraulic log clamp | | • | | • | | _ | | _ | | _ | | | | |
| Safety cover | | | _ /I- | | | • -hanical\ | | • | ' | • | | | | |
| AC 10 automatic chain tensioner | , , | draulic) | • (ny | draulic) | | chanical) | | | | | | | | |
| HakkiCut™ cutting control | | • | | • | | • | | | | | | | | |
| Automatically optimised cutting speed | | • | | • | | • | | _ | | _ | | | | |
| Automatic chain oil lubrication | | • | | • | | • | | • | ' | • | | | | |
| Hydraulically retracting log measuring device | | • | | • | | | | | | | | | | |
| Guide plates for controlled landing (landing plates) | | | | • | | | | | | | | | | |
| HakkiSplit™ delay-free splitting (3 speeds) | | • | | • | | | | | | | | | | |
| Hydraulic height adjustment of the splitting blade | | • | | • | | • | | | | | | | | |
| Hydraulically pivoting outfeed conveyor | | • | | • | | • | | | | • | | | | |
| Outfeed conveyor speed control | | everse) | • (+r | everse) | | everse) | | • | | • | | | | |
| Cleaning outfeed conveyor | | • | • | | • | | • | | • | | (| | | |
| Outfeed conveyor extension (1 m/ 3'3") *** | | • | | | | | | | | | ■ (0.8 | m/31") | | |
| Blower saw-dust removal | | • | | | | • | • | | : | | | | | |
| Oil heater | | • | | | | • | | | | | | • | | |
| Oil cooler | | • | | | | • | | | | | | | | |
| Tool box | | • | | • | | • | | • | - | • | | | | |
| Adjustable work platform | | • | | • | | | | | | | | | | |
| Power source | | | | | | | | | | | | | | |
| PTO (cardan shaft) | | • | | • | | • | | • | | • | | • | | • |
| PTO /electric motor (combi) | | • | • | | • | | | • (7.5 kW) | | | | • | | |
| Electric motor (kW) | | • (15) | • (15) | | • (10) | | | • (7.5) | | • (7.5) | | • (7.5) | | • (4.0) |
| PTO power requirement (hp) | | 35 | 35 | | 25 | | | 20 | | 20 | 2 | 25 | | 20 |
| Fuse size (A) (slow type C) | 3 | 35 | 35 | | 25 | | | 20 | 1 | 16 | 20 | | 16 | |
| Hakki Pilke Powerpack | | • | • | | | • | • | | • | | • | | • | |
| Petrol engine kit | | • | | • | | • | • | | | | | | | |
| Machine dimensions in the transport position | on | | | | | | | | | | | | | |
| Height (mm) | 2,900 | 9'6" | 2,560 | 8′5″ | 2,520 | 8'3" | 2,530 | 8'3" | 2,450 | 8'0" | 2,480 | 8′1″ | 1,300 | 4'3" |
| Length (mm) | 3,100 | 10'2" | 2.540 | 8'4" | 2,480 | 8′1″ | 2,550 | 8'4" | 2,500 | 8'2" | 2,550 | 8'4" | 950 | 3′1″ |
| Width (mm) | 1,520 | 5′0″ | 1,400 | 4′7″ | 1,300 | 4'3" | 1,250 | 4'1" | 1.200 | 3′11″ | 800 | 31" | 1,700 | 5′7″ |
| Weight (kg) | 2,200 | 4,850 lbs | 1,400 | 3,087 lbs | 880 | 1,940 lbs | 870 | 1,918 lbs | 750 | 1,653 lbs | 560 | 1,235 lbs | 185 | 408 II |
| Outfeed conveyor length (m) ** | 4.0 | 13′1″ | 4.0 | 13′1″ | 4.0 | 13′1″ | 4.0 | 13′1″ | 4.0 | 13'1" | 3.2 | 10'6" | | |
| Splitting blades | | | | | | | | | | | | | | |
| 2/4 | | • | | • | | • | | • | | • | | • | | |
| 6 | | • | | • | | • | | • | - | | | | | |
| 8 | | • | | • | | • | | | | | | | | |
| 12 | | • | | • | | • | | | | | | | | |
| 16 | | | | • | | | | | | | | | | |
| Log lifters | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| – HakkiLift Raven | + | | | | | | | 0 | | | | | | |
| HakkiLift Raven HakkiLift Falcon | | | | | | • | | | | | | | | |
| – HakkiLift Falcon | | | | | | | | | | | | | | |
| – HakkiLift Falcon – HakkiLift 381 | | | | | | | | | | | | | | |
| – HakkiLift Falcon – HakkiLift 381 Log racks and tables | | | | | | _ | | | | | | | | |
| – HakkiLift Falcon – HakkiLift 381 Log racks and tables – HakkiFeed 371 | | | | _ | | • | | | | • | | • | | |
| HakkiLift Falcon HakkiLift 381 Log racks and tables HakkiFeed 371 HakkiFeed 422 | | • | | • | | • | | | | • | | • | | |
| – HakkiLift Falcon – HakkiLift 381 Log racks and tables – HakkiFeed 371 | | • | | | | | | | 1 | • | | • | | |

23 HAKKI PILKE FIREWOOD PROCESSORS HAKKI PILKE FIREWOOD PROCESSORS



THE MOST RELIABLE AND GLOBALLY SOUGHT-AFTER PARTNER

HAKKI PILKE FIREWOOD PROCESSORS FOR MORE THAN 30 YEARS

Initially, there were three young men, a garage and an abundance of enthusiasm and expertise – that was the beginning of the most popular firewood processor of all time, Hakki Pilke.

A burning desire to develop machines for agriculture and forestry that would make work easier and improve productivity drove the friends and their business forward. Now, four decades later, firewood producers on six continents and more than 35 countries rely on Hakki Pilke. We provide state-of-the-art technology and innovations that have helped improve the efficiency and productivity of tens of thousands of firewood producers.

In the 1990s, we revolutionised firewood production with our Hakki Pilke 2X and Hakki Pilke 1x37 machines, the latter of which is the best-selling firewood processor in the world. Today and far into the future, Hakki Pilke quality will always stem from the passion to design, develop and manufacture the best firewood processors in the world – along with the desire to build the leading team on the markets together with our customers and retailers. As an owner of a Hakki Pilke firewood processor, you are never alone.

With us, actions speak louder than words. Continuous improvement and understanding our customers' needs have made us the global market leader. We know firewood producers and they most assuredly know us. The Hakki Pilke brand is also known for its excellent after-sales services and strong distribution channels around the world.

When you need the best quality, professional expertise and partnership, the only choice is Hakki Pilke. The reliability of Hakki Pilke machines is confirmed every day on work sites the world over. As a pioneer in the field, we have only one direction – to go forward and produce even more productive, efficient and easy-to-use machines.

Maaselän Kone Oy, the manufacturer of the Hakki Pilke firewood processors, is part of the Terra Patris group, which focuses on firewood processors, excavation machines, contract production and boat production. The group's strong international expertise and financial support lay a solid foundation for competitive and result-oriented operations as well as long-term growth.

Manufacturer